




THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF THE RAMSEY WINCH COMPANY.

REVISIONS				
SYM	DESCRIPTION	ECN	DATE	DR.
A	RELEASE FOR PRODUCTION	14467	9/5/2008	CDS
B	ADDED VARIOUS DIMENSIONS AND NOTES	30368	11/8/12	JAM

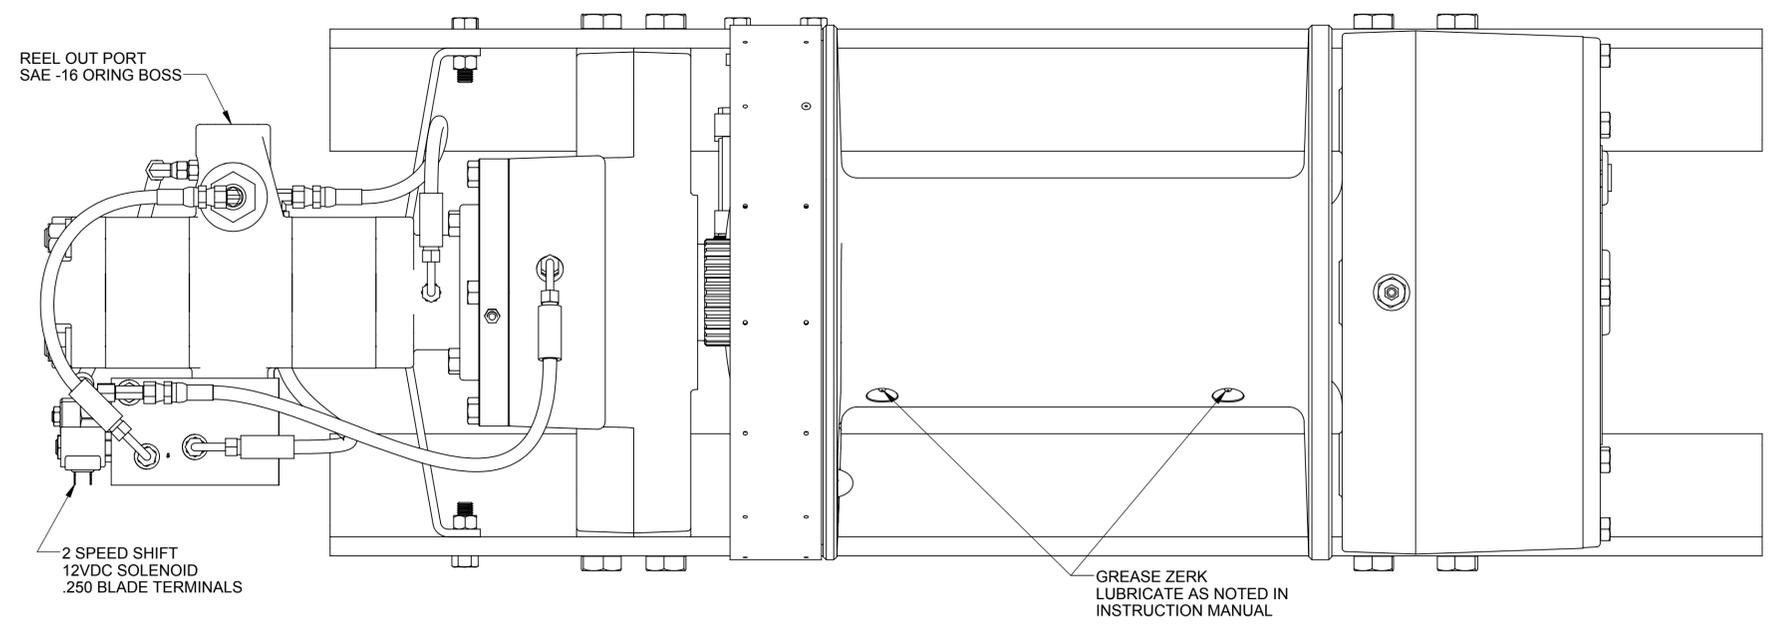

PERFORMANCE											
APPROXIMATE WEIGHT:		976 LBS									
WORKING PRESSURE:		2600 PSI									
CABLE DIAMETER:		7/8 INCH									
FLOW:		60 GPM									
LAYER	CABLE CAPACITY		LOW SPEED				HIGH SPEED				
	Ft	m	LINE PULL		LINE SPEED		LINE PULL		LINE SPEED		
			Lb	Kg	fpm	mpm	Lb	Kg	fpm	mpm	
1	30	9	50000	22670	36	11	25000	11340	72	22	
2	75	23	41300	18730	44	13	20650	9367	87	27	
3	125	38	35200	15960	51	16	17600	7983	102	31	
4	130	55	30700	13920	59	18	15350	6963	117	36	
5	245	75	27200	12330	66	20	13600	6169	132	40	

- NOTES:
- WINCH IS NOT TO BE USED FOR LIFTING OR MOVING OF PERSONS.
  - 5 WRAPS OF CABLE MUST BE LEFT ON THE DRUM TO HOLD LOAD.
  - MOTOR PORTS ARE SAE-16 O-RING
  - SHIFT SOLENOID IS 12VDC
  - 100-130 PSI AIR PRESSURE REQUIRED FOR BAND BRAKE AND CLUTCH CYLINDERS.
  - LUBRICANT CAPACITY 6 QUARTS
  - RATIO: 64:1
  - CASE DRAIN MUST BE CONNECTED FOR PROPER WINCH FUNCTION.

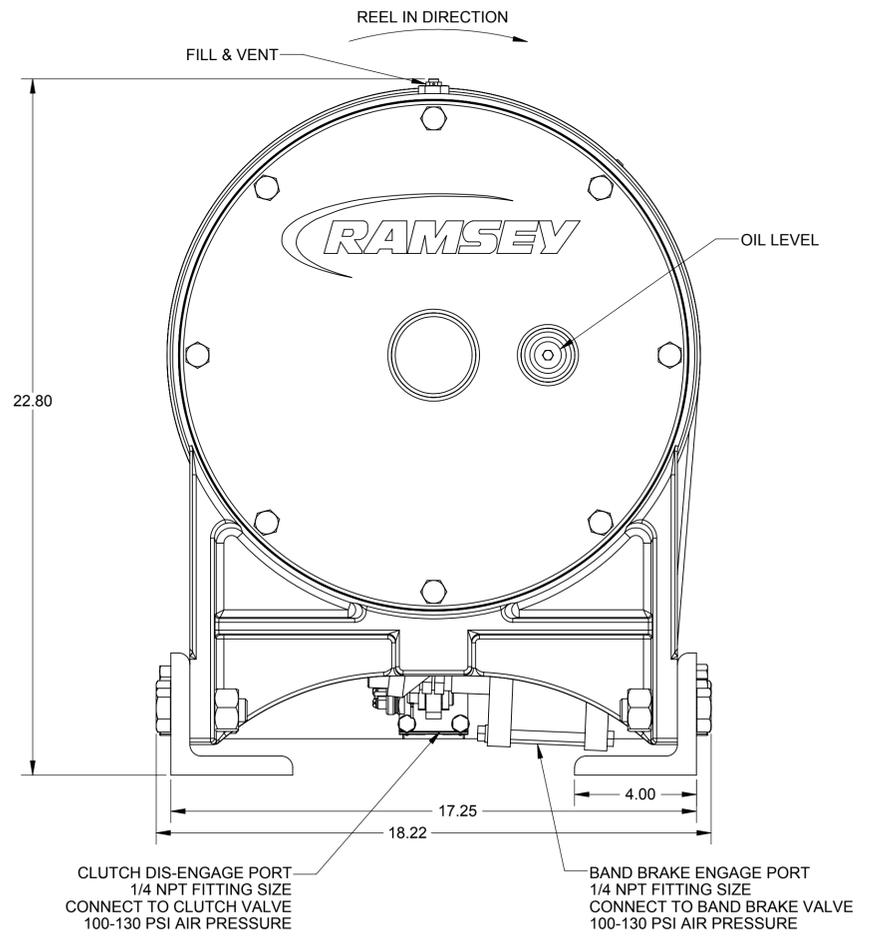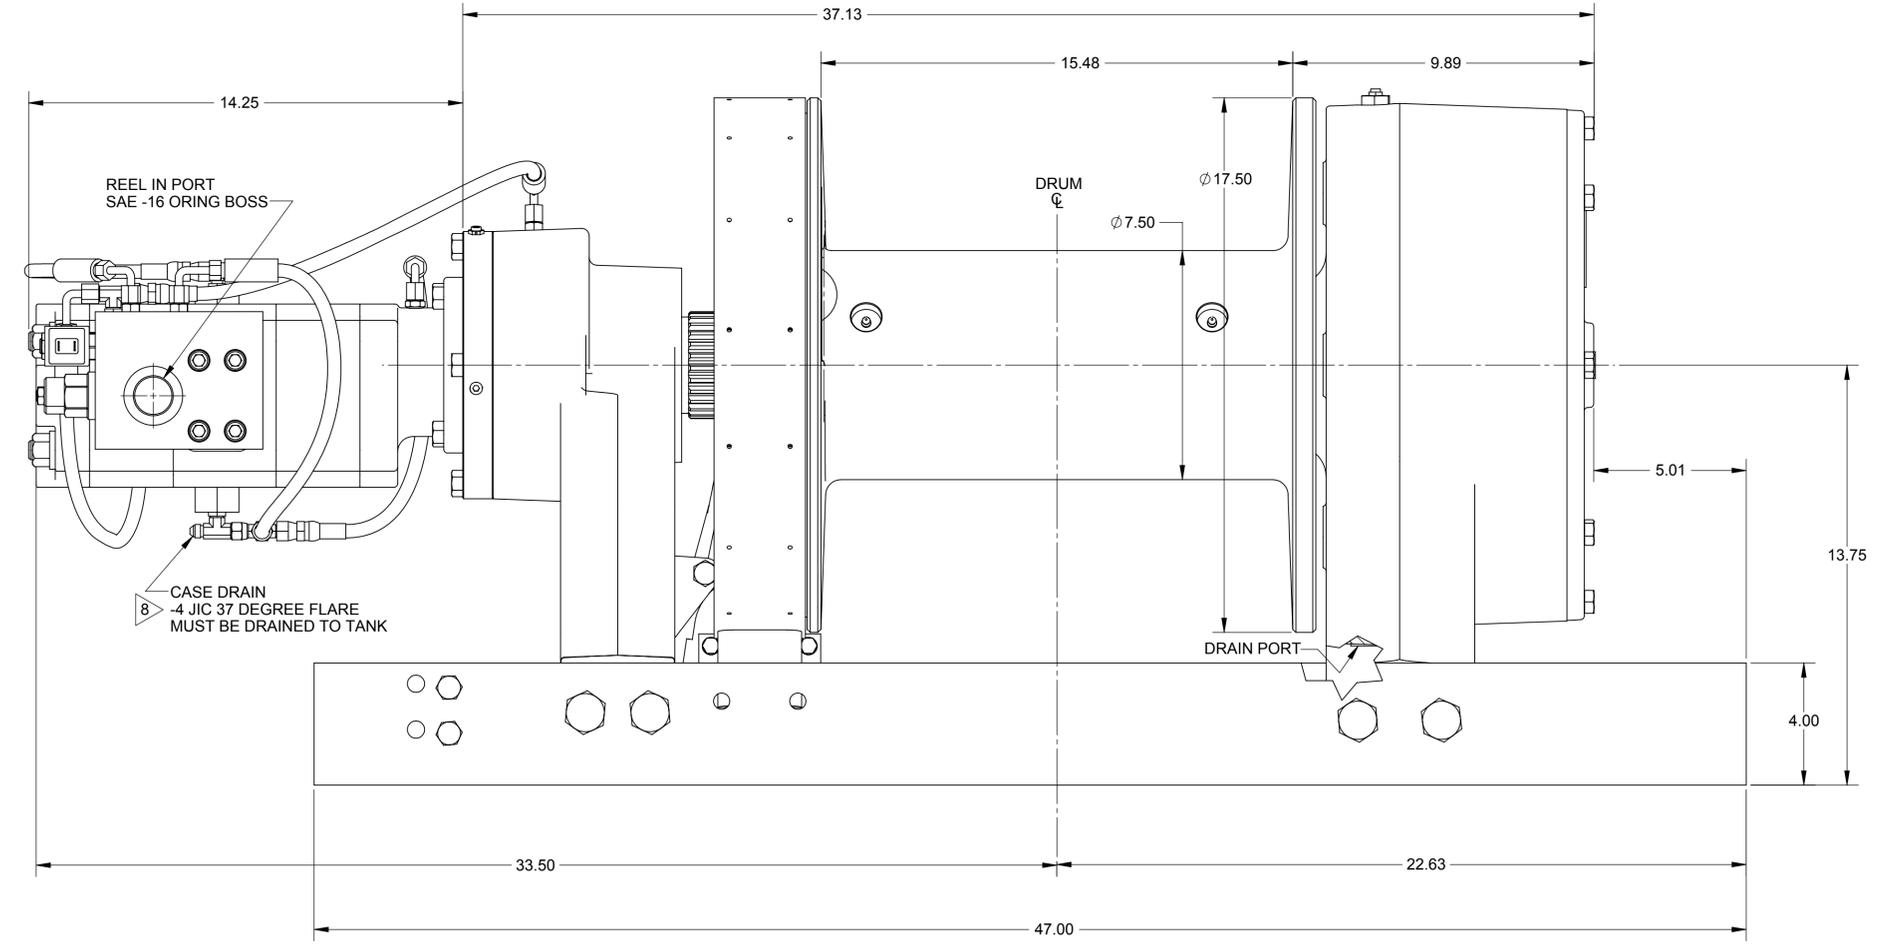

INCH TOLERANCE UNLESS OTHERWISE SPECIFIED		NAME	DATE	TITLE	
DECIMALS		DRAWN BY	7-3-08	ASSEMBLY 50K WILDCAT	
X ±.06	.XX ±.030	APPROVED BY	SEE ECN	SCALE (DO NOT SCALE) 1:1	
ANGULAR ±0° 30' DEGREES		NEXT ASSY			
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.					
					<b>127100</b>
					REV. <b>B</b>
					SHEET 1 OF 1